


central party


Store domains found while loading foo.org, bar.org, baz.org, ..., from several vantage points

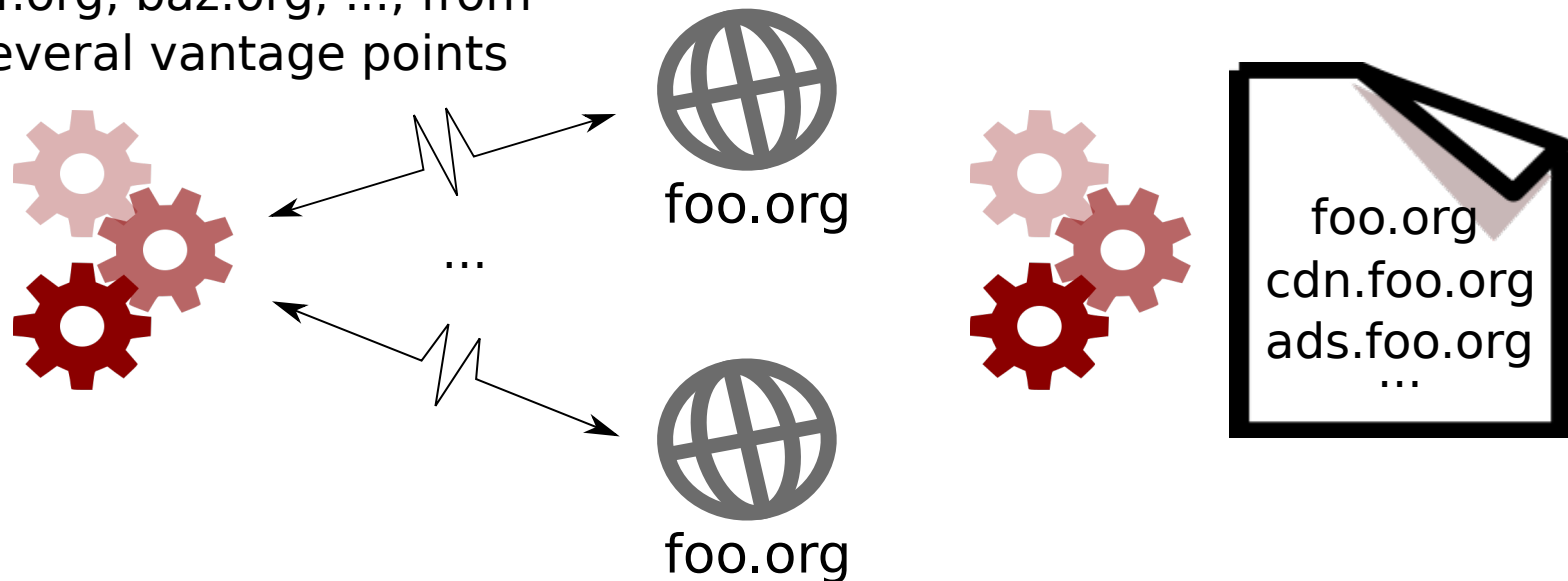

Phase 1 - visit sites on a popularity list

Phase 2 - compile allowlist with unique domain names

relay

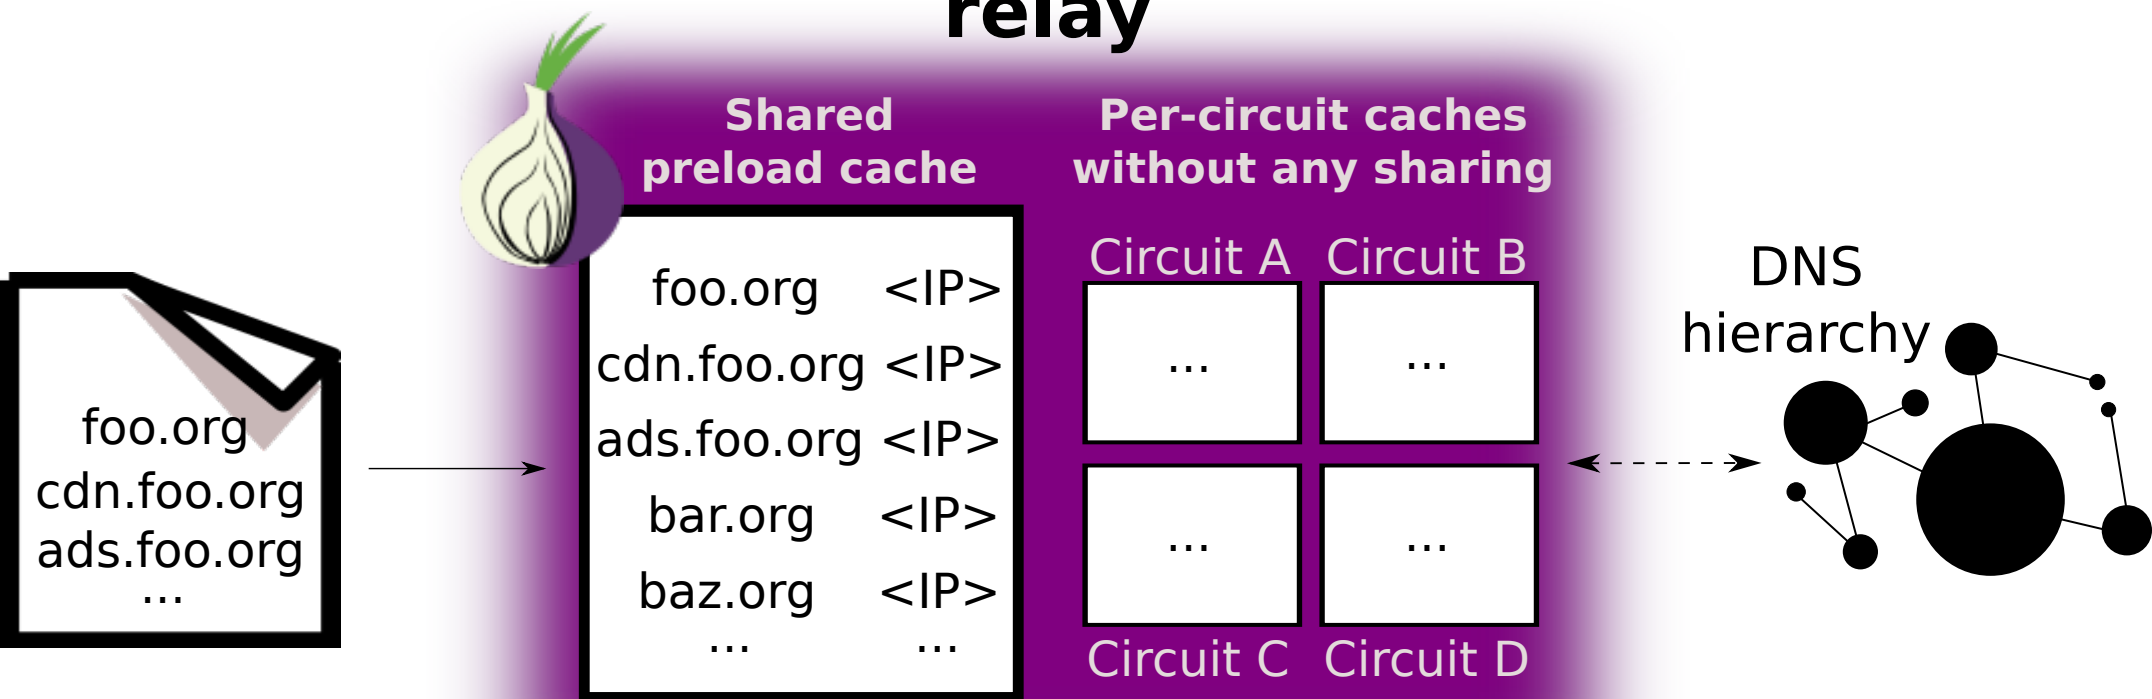

Phase 3 - periodically resolve all domains in allowlist locally